



CORPORATION
de la Cité de/ of the City of
CLARENCE-ROCKLAND

ADDENDUM #1

05/04/2017 8:58

Hot Mix Asphalt

Tender Number

F18-INF-2017-012

Request for Proposals Issued On:
22-Feb

Proposal Submission Deadline: 2:00:00pm Local Time in Clarence-Rockland Ontario, Canada on

7-Apr-17


THE INFORMATION CONTAINED IN THIS DOCUMENT IS TIME SENSITIVE

Please note: This addendum is to be considered part of the above noted Request for Tender as though included with the original version. This addendum does not affect the closing date/time: Bidders should acknowledge receipt of all Addendum / Addenda by inserting in the space provided on the Bid Submission Form, the numbers of all Addendum / Addenda received during the bidding period.

QUESTION REQUESTING CLARIFICATION

The following questions were received:

1	Question:	In item 2 and 3 of Pricing schedule, what are the specs of frame and covers for manholes and catch basins, since this will affect pricing.
	Reply:	Specifications for frame and covers are as per OPSD 400.020, 400.070 and 400.010.
2	Question:	Are items "2.1" and 4 the same as items 6 and 7 as these would fall in the "adjusting" price (without riser) as it was in previous years. Consequently 6,7 would be adjustment with riser.
	Reply:	item 2 and 3 are for adjustment and frame and cover to be supplied by contractor, item 4 is with a salvaged frame and cover. Item 6 & 7 are like previous years, adjustment including adjustment rings if required.
3	Question:	Please define "rebuild structure". Does this mean having to chip away at concrete or having to excavate full depth of structure in order to set at proper elevation? or are items 2 and 3 only supply and install new frames and covers.
	Reply:	Rebuilt structure, is considered to chip or saw cut the top of the structure to allow the placement of an adjustment ring and to reinstalled the frame and cover at proper finish road grade.
4	Question:	A lot of manholes or catch basins only need adjustments. Do you still want to combine adjustments with risers although alot of them don't need any risers?
	Reply:	The unit price shall include the adjustments with or without risers.

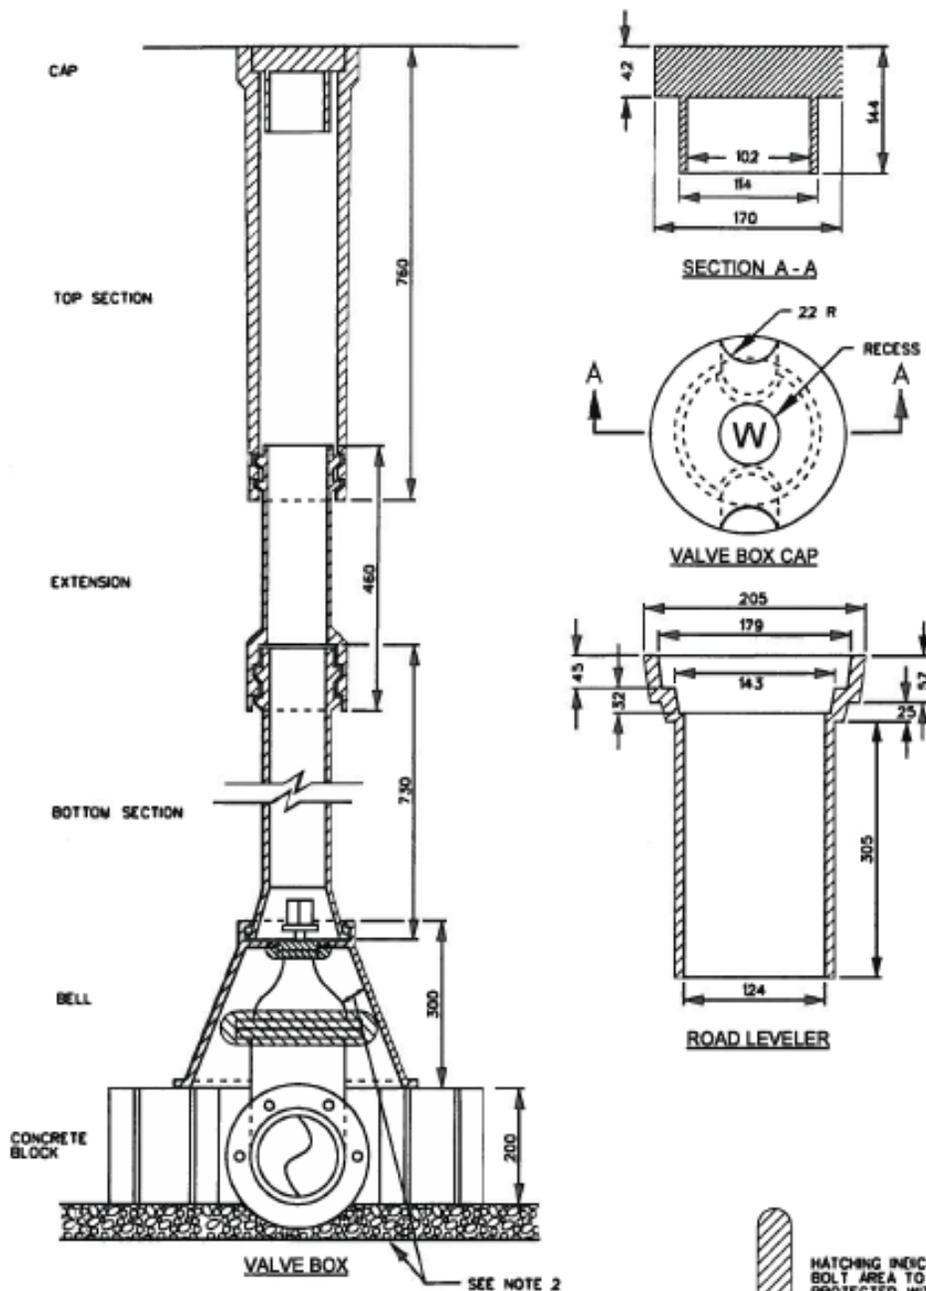

HATCHING INDICATES BOLT AREA TO BE PROTECTED WITH AN APPROVED PETROLATUM TAPE SYSTEM

NOTES:
 FOR AUXILIARY, SERVICES AND ISOLATION VALVES.

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS SHOWN OTHERWISE.
2. FOR 200 AND 250mm VALVES, ADD BEDDING BELOW THE CONCRETE BLOCKS AS REQUIRED TO RAISE BELL HIGH ENOUGH TO PREVENT CONTACT WITH THE VALVE BONNET.

SEE NOTE 2

VALVE BOX ASSEMBLY

DATE:	MAY 2001
REV. DATE:	MARCH 2007
DWG. No.:	W24